


CREST25

Open Flow Pumps

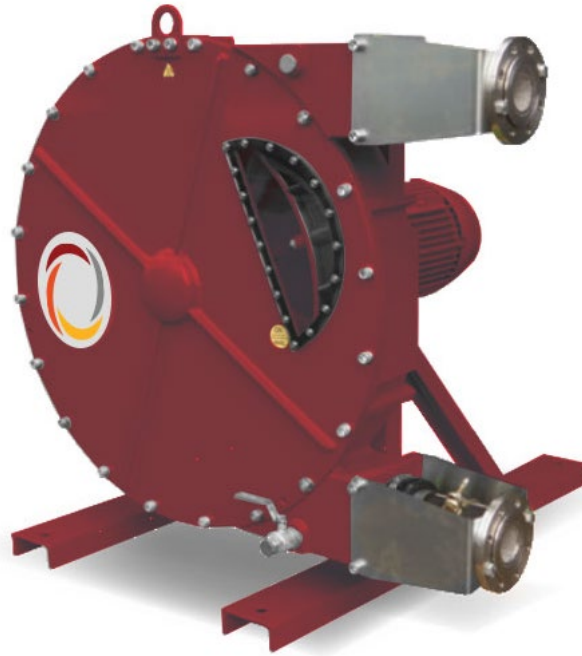


DAEPUMPS.COM

info@daepumps.com

(760) 821-8112

CREST25

Data Sheet

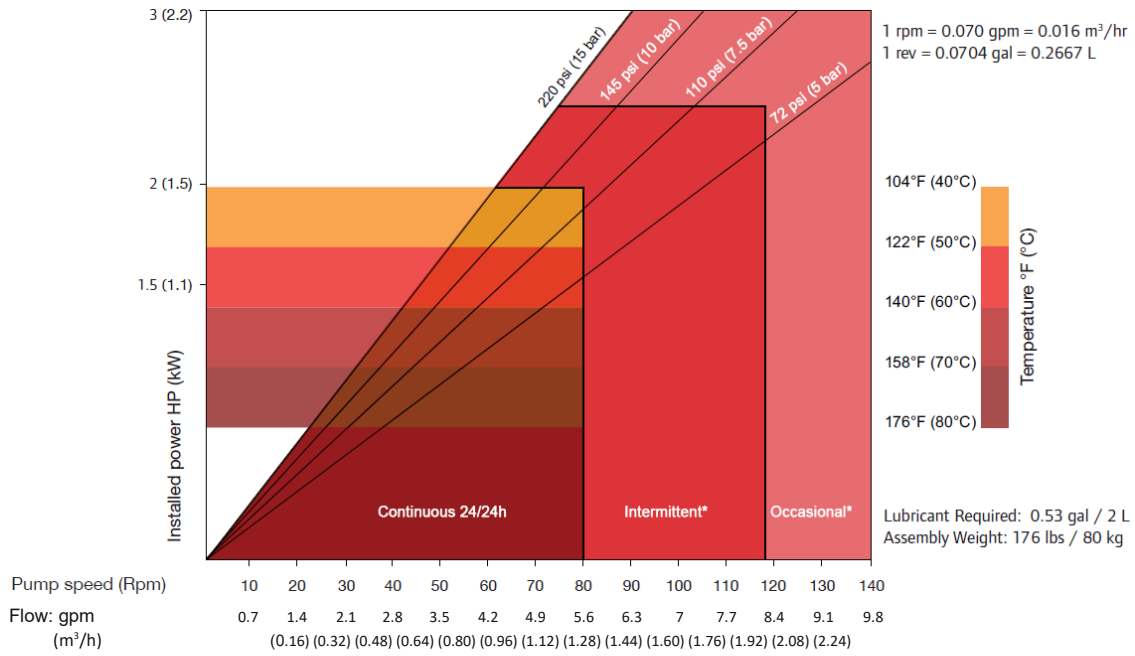


| SHIMMING TABLE - CREST25 | | |
|------------------------------|-------------|--|
| Pressure psi (bar) | Speed - rpm | Number of shims* - thickness 0.019 in (0.5 mm) |
| ΔP ≤ 72.5 (5) | 0 to 40 | 0 |
| | 40 to 160 | 0 |
| 72.5 (5) ≤ ΔP ≤ 108.75 (7.5) | 0 to 40 | 2 |
| | 40 to 125 | 1 |
| 108.75 (7.5) ≤ ΔP ≤ 145 (10) | 0 to 40 | 3 |
| | 40 to 105 | 2 |
| 145 (10) ≤ ΔP ≤ 217.5 (15) | 0 to 40 | 4 |
| | 40 to 90 | 3 |

*Remove one shim if temperature exceeds 140° Fahrenheit (60° Celsius)

DIMENSIONS

Inch (mm)

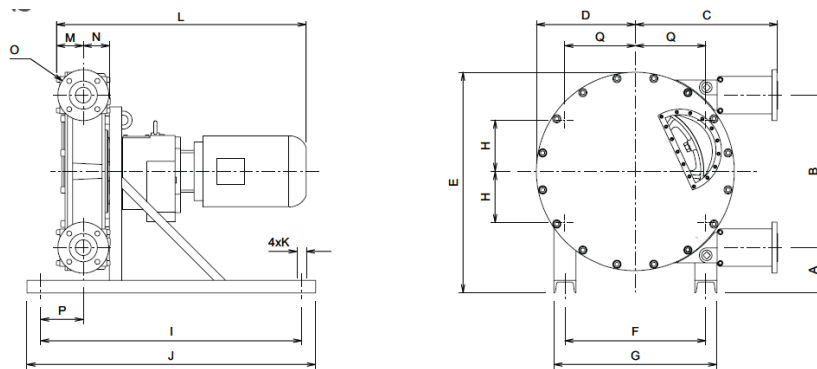

| TYPE | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q |
|---------|-------------|---------------|---------------|--------------|-------------|---------------|---------------|--------------|---------------|---------------|-------------------|---|-------------|-------------|---------------------------------|-------------|--------------|
| CREST25 | 3.7 (95) | 10.3 (262) | 14.0 (356) | 5.3 (134) | 17 (430) | 12.0 (307) | 13.7 (347) | 4.3 (110) | 20.5 (520) | 21.6 (550) | 4xø0.5 (4xø13) | - | 2.4 (62) | 2.4 (62) | ANSI 1 in / 150# (DN25 PN16) | 2.8 (71) | 4.3 (110) |