


# GALA 200

## Rotary Lobe Pumps

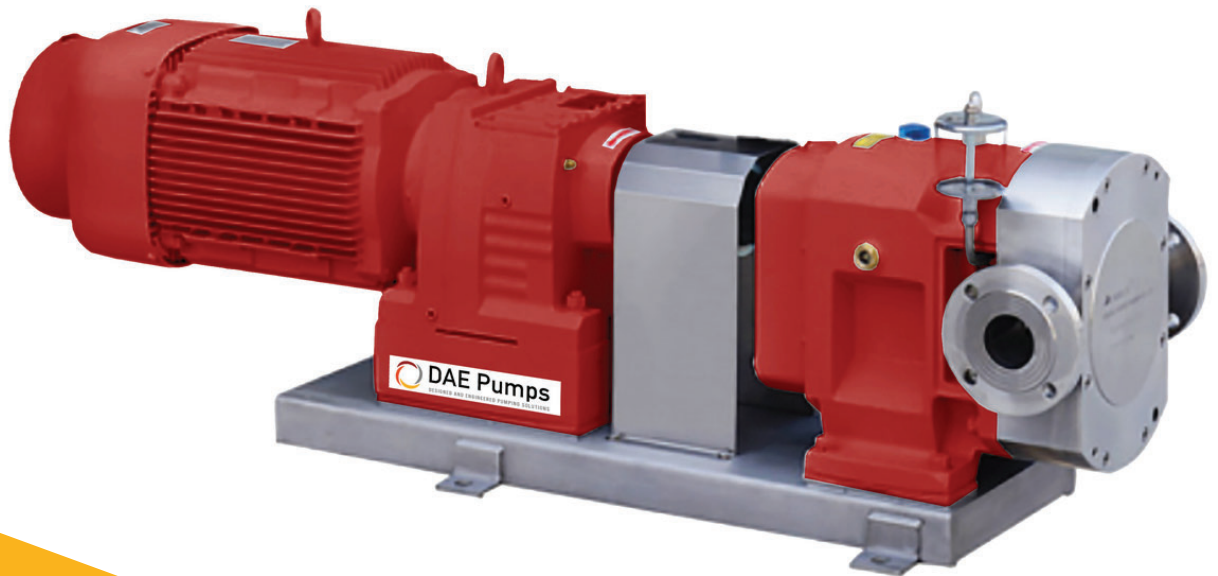


**DAEPUMPS.COM**

info@daepumps.com

(760) 821-8112

# Gala 200 Rotary Lobe Pumps

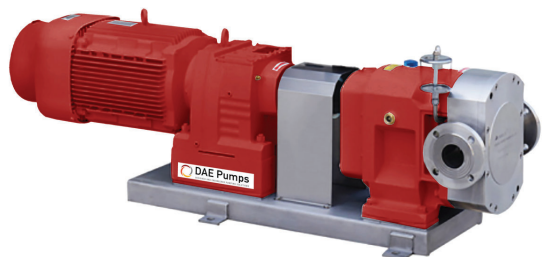

SPECIFICATIONS	US	Metric
<b>Rated Capacity:</b>	0-72 gpm	0-16 m <sup>3</sup> /hr
<b>Displacement (per 100 revolutions):</b>	8 gal (US)	30 L
<b>Maximum Continuous Pressure:</b>	175 psi	12.1 bar
<b>Starting Torque:</b>	720 in lbf	127 N m
<b>Rated Speed:</b>	0-900 RPM	0-900 RPM
<b>Shaft Diameter:</b>	1.1"	28 mm
<b>Flange Connection Class:</b>	ANSI 16.5-150#	DN – PN 16
<b>Flange Connection Size:</b>	ANSI 2"	DN 50
<b>Weight:</b>	150 lbs	68 kg
<b>Solids Handling:</b>		
<b>Spherical Compressible</b>	0.75"	19 mm
<b>Spherical Hard*</b>	1/8"	3 mm


\* Larger hard solids will pass through but may cause damage.

MODEL: SERVICE	Gala 200-S Sludge, Mud and Slurries*	Gala 200-C Chemical/Corrosive	Gala 200-X Oil, Gas & Abrasives
<b>WETTED PARTS</b>			
<b>Rotary Lobes</b>			
Elastomer	NBR Opt. HNBR, FKM, EPDM or Eng. Rec.	FKM or HNBR Opt. NBR, EPDM or Eng. Rec.	FKM or HNBR Opt. NBR, EPDM or Eng. Rec.
Lobe Profile	Helix	Helix	Helix
Number of lobe wings	6	6	6
Core	Carbon Steel	Carbon Steel	Carbon Steel
<b>Sealing Elastomers</b>			
O-rings	FKM	FKM or Engineer Recommendation	FKM or Engineer Recommendation
Lip seals	FKM or Engineer Recommendation	FKM or Engineer Recommendation	FKM or Engineer Recommendation
<b>Mechanical Seals</b>			
Mechanical Seal	Duronit Opt. Tungsten Carbide, Silicon Carbide or Eng. Rec.	Silicon Carbide Opt. Tungsten Carbide or Engineer Rec.	Tungsten Carbide Opt. Silicon Carbide or Engineer Rec.
Seal Holders	Carbon Steel with Corrosion resistant coating	Stainless Steel Type 316	Duplex Stainless Steel
<b>Wear Plates</b>	AR500 Steel (Brinell 500)	Duplex Stainless Steel	Duplex Stainless Steel
<b>Pump Wetend Housing</b>			
Proform design**	ASTM A48 Grey Iron	Duplex CD3Mn Stainless Steel	Duplex CD3Mn Stainless Steel
<b>Bolts</b>	Carbon Steel ISO 898-1	Stainless Steel A2-A4	Duplex Stainless Steel
<b>Pressure Disc</b>	Stainless Steel Type 316L	Stainless Steel Type 316L	Duplex Stainless Steel
<b>LIMITED EXPOSURE PARTS</b>			
<b>Pump Cover</b>	Carbon Steel Opt. Engineering Recommendation	316 Stainless Steel Opt. Engineering Rec.	Duplex Stainless Steel Opt. Eng. Rec.
<b>NON-WETTED PARTS</b>			
<b>Quench/Seal Cooling Chamber</b>	Carbon Steel	Carbon Steel	Carbon Steel
<b>Gears</b>	GMA Class 9 AISI 1045 steel	GMA Class 9 AISI 1045 steel	GMA Class 9 AISI 1045 steel
<b>Gear Housing</b>	Carbon Steel or ASTM A48 Grey Iron rust primed	Carbon Steel or ASTM A48 Grey Iron	Carbon Steel or ASTM A48 Grey Iron
<b>Shaft</b>	AISI 4140 Alloy Steel	AISI 4140 Alloy Steel	AISI 4140 Alloy Steel
<b>PAINTING REQUIREMENTS</b>			
<b>Standard Painting</b>	SSPC/SP6 Sandblast Paint	SSPC/SP6 Sandblast Paint	SSPC/SP6 Sandblast Paint
<p><b>NOTE:</b> Listed above are standard pump assemblies; styles and materials subject to recommendation by DAE Engineering. A wide range of optional materials are available for each model. Consult DAEPumps.com for further information. *Consult Factory for application temperature above 80°C (175°F). **Proform housing segment incorporates housing segment, flange ring, barrier plate and integral suction and discharge flange fittings in one piece. Component Design available in Sc line.</p>			

# Gala 200 | Rotary Lobe Pumps

## Performance Curve - NBR Lobes\*

Based on 70°F (21°C) fresh water (1 cp) at Sea Level.  
Output will increase as viscosity of the fluid increases from 1.

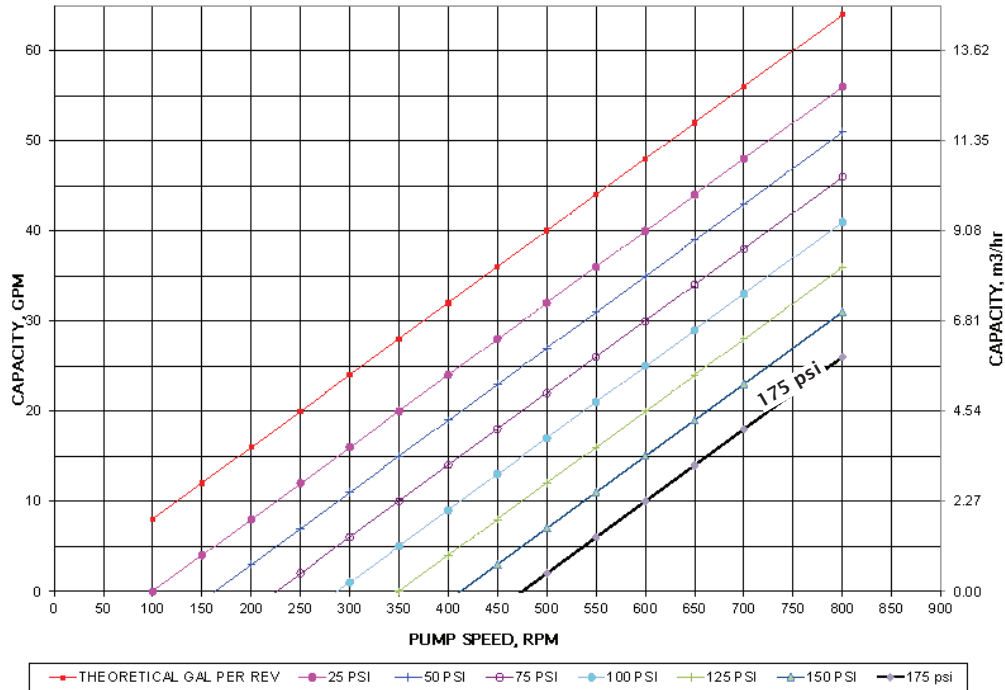

\*Note: Output from lobes coated with elastomers other than NBR maybe lower. Contact Engineering for further information.

## Horsepower Requirements

